




SERIES
UPS On Line

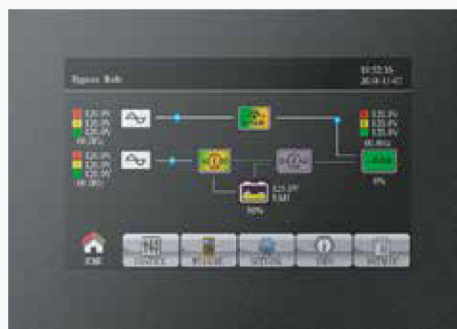

5" Touch LCD Panel

SERIE SILVER

SSV103-803

3 PHASE IN/3 PHASE OUT



ONLINE UPS

- DSP technology guarantees high reliability**
 DSP and MCU dual chips to secure the product reliability.
- Optional programmable relay dry contact card**
 Configurable 4 dry contact ports definition through software for various applications.
- Output power factor 1**
 For critical applications, this 3-phase online UPS with output power factor 1.0 ensures higher efficiency and advanced performance.
- Voice warning / error code notice**
 Inbuilt the speaker to have human voice for the warning / error codes notice instead of traditional beeps.
- Adapting the latest Silicon carbide diodes to enhance the system efficiency**
 Through adapting the latest Silicon carbide diodes, no matter it's in AC mode and battery mode, the efficiency is higher than 96%.
- High overload capability**
 Supporting 110% overload capacity for 60 min and up to 1 min overload condition at 150% load.
- Dual Inputs**
 SSV series is also available for optional dual inputs to support various inputs to have flexibility for system configuration.
- Adjustable battery design**
 The number of connected batteries can be adjusted flexibly based on different power demands.
- Very powerful charger to shorten the recharge time**
 Adapting the charger rating equals to 30% of UPS capacity on 10/20Kva. Charger rating is also 20% of UPS capacity for 30Kva and above models.
- Dynamic password feature optimizes service performance**
 This dynamic password is automatically generated from our exclusive utility tool. Each time when it is required to change service-related settings, this utility tool would generate an unique password on time basis. It secures UPS from unexpected operation due to unauthorized settings.
- Adjustable charging current**
 Users can adjust charging current via LCD setting based on various battery configurations.
- Power walk-in function**
 Galleon II 33 is designed to have flexible power walk-in by way of adjusting the power walk-in time. This setting will optimize generator sizing and reduce the impact to the AC source by having different walk-in time period for different paralleled UPS system when AC grid is recovered.
- Parallel up to 6 units with common battery pack**
 Supports maximum 6 units in parallel with common battery pack for the parallel system.
- 5" color touch type LCD display**
 Inbuilt 5" color touch type LCD display with 500 event/data logs.



55-5796-2481
55-5794-9792

01 800 8418901

<https://www.realpowersystems.com>
info@realpowersystems.com

SSV 3-phase in/3-phase out Online UPS Selection Guide

MODEL		10K (L)*	15K(L)	20K (L)*	30K (L)*	40K (L)	60KL	80KL
PHASE		3-phase in / 3-phase out						
CAPACITY		10KVA /10KW	15KVA /15KW	20KVA /20KW	30KVA /30KW	40KV /40KW	60KVA /60KW	80KVA /80KW
PARALLEL CAPABILITY		up to 6 units in parallel						
INPUT								
Nominal Voltage		3 x 380/400/415 VAC (3Ph+N)						
Voltage Range		-30% ~ +20%						
Frequency Range		40~70 Hz						
Power Factor		≥ 0.99 @ 100% Load						
Harmonic Distortion (THDi)		< 3% at full linear load						
OUTPUT								
Output Voltage		3 x 360*/380/400/415 VAC (3Ph+N)						
AC Voltage Regulation (Batt. Mode)		± 1%						
Frequency Range (Synchronized Range)		46~54Hz or 56~64Hz						
Frequency Range (Batt. Mode)		50/60 Hz ± 1%						
Current Crest Ratio		3:1 (max.)						
Harmonic Distortion		≤ 1 % THD (Linear Load) ; ≤ 3 % THD (Non-linear Load)						
Transfer Time	AC Mode to Batt. Mode	Zero						
	Inverter to Bypass	Zero						
Waveform (Batt. Mode)		Pure Sine wave						
Overload Capability		100-110% for 60 min, 111-125% for 10 min, 126%~150% for 1 min; >150% or 400ms						
BYPASS								
Nominal Voltage		3 x 380/400/415 VAC (3Ph+N)						
Voltage Range		-30% ~ +20% (Adjustable)						
Frequency Range (Synchronized Range)		46~54Hz or 56~64Hz						
Overload Capability		> 130% 1 minute (default) Continuously working until breaker protection (optional)						
EFFICIENCY								
AC Mode		96.0%						
ECO Mode		99.0%						
Battery Mode		96.0%						
BATTERY								
Standard Model	Battery Type	12 V/9 Ah	12 V/9 Ah	12 V/9 Ah	12 V/7 Ah	12 V/9 Ah	N/A	
	Numbers	(10+10) pcs	(16+16) pcs	(16+16) pcs	(16+16) pcs x 2 strings			
	Typical Recharge Time	9 hours recover to 90% capacity						
	Charging Current (max.)	1A ~ 12A (Adjustable)				1A ~ 16 A (Adjustable)		
	Charging Voltage	+/-136.5 VDC ± 10%	+/-218 VDC ± 10%					
Long-run Model	Battery Type	Depending on the applications						
	Numbers	+/- 10 pcs	+/-16 pcs ~ +/- 20 pcs (Adjustable)					
	Charging Current (max.)	1A ~ 12A (Adjustable)				1A ~ 16 A (Adjustable)	2A ~ 24 A (Adjustable)	2A ~ 32A (Adjustable)
	Charging Voltage	+/-136.5 VDC ± 10%	+/-13.65V x N (N=16~20)					
INDICATORS								
LCD Panel		UPS status, Load level, Battery level, Input/Output voltage, Discharge timer, and Fault conditions						
PHYSICAL								
Standard Model	Dimension,DxWxH (mm)	630 x 250 x 826			815 x 300 x 1000		N/A	
	Net Weight (kgs)	124	139		225	250		
Long-run Model	Dimension,DxWxH (mm)	630 x 250 x 826			815 x 300 x 1000		790 x 360 x 1010	
	Net Weight (kgs)	28	43		60	67	108	113
ENVIRONMENT								
Operation Temperture		0-40°C						
Operation Humidity		< 95% and non-condersing						
Altitude**		0 ~ 1500m at full load						
Noise Level		Less than 60 dB @1 Meter			Less than 63 dB @1 Meter		Less than 65 dB @1 Meter	
MANAGEMENT								
Smart RS-232 / USB		Supports Windows² 2000/2003/XP/Vista/2008, Windows² 7/8/10, Linux and MAC						
Optional SNMP		Power management from SNMP manager and web browser						

*If output voltage is set as 3 x 360VAC, the output power of the unit will be de-rated to 90%.

**If the UPS is installed or used in a place where the altitude is higher than maximum height, the output power will be derated 1% per 100m.

Product specifications are subject to change without further notice.